

# Operating Features of the **COMBOGARD (33E)**

LAGARI  
33E

## 1. **Anti Tamper:**

Entering Four (4) wrong sets of numbers in a row, puts the lock into an 8 minute lock out penalty time in which the lock is inoperable.

During the penalty time the LED flashes at 10 second intervals. A further one (1) incorrect entry will put the lock into penalty time again. Only the correct number will open and reset the lock.

## 2. **Low Battery Indication:**

A continuous tone during an opening means the battery needs replacing. The snake eyes on the keypad will allow entry with a new battery in the event of a totally flat battery.

## 3. **Battery Replacement:**

The battery is contained internally within a black box attached to the door.

To change, lift the cover of the box to expose the battery.

**USE ONLY 9 VOLT ALKALINE Batteries.**

There is **NO** memory **LOSS** from battery removal for any length of time.

There is no consideration in the lock for Operators memory loss.

**Note:** If lock does not operate after battery change over, check quality of replacement battery or substitute new battery and try again.

The Combogard 33E has programming options for Management please contact your nearest Distributor or CMI Safe Co for further information.


For any further information on this lock or any CMI Safe Co products contact your nearest Distributor or CMI Safe Co. 244 West St, Carlton NSW 2218 • Phone: 9547 1488 • Fax: 9547 2104

*Operating Instructions*  
for

33E

**COMBOGARD KEYPAD  
ELECTRONIC  
COMBINATION LOCK**

(Lock Model # 33E)

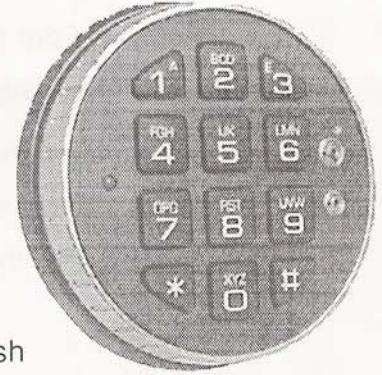

► **To Open:**

Enter number 1 2 3 4 5 6 (Factory Set)

Each number is accompanied by a Beep & Flash

2 Beeps at end of entry signifies number Accepted

3 Beeps at end of fourth (4th) entry indicates wrong number, you are now in penalty time. See over page for explanation. Anti tamper.

On a successful number entry, turn Keypad Clockwise until it stops.  
Lock is now open.

► **To Lock:**

Close door

Turn Keypad Anti Clockwise until it stops

► **To Change Number:**

Enter 0 0 0 0 0 0 (6 zero's)

Enter old number (Factory set 1 2 3 4 5 6)

Enter new number twice e.g.(142536 + 142536)

2 Beeps signifies number accepted

Test new number

**Note:** The number returns to original if the change is unsuccessful

Battery life on 2 openings per day is approx. 12 months.

To open when batteries are flat, use "Snake Eyes" contacts on keypad face with new battery.  
Battery must be kept in contact with "Snake Eyes" until Keypad is completely turned.

**Use Alkaline Batteries Only.**

For any further information on this lock or any CMI Safe Co products contact your nearest Distributor  
or CMI Safe Co. 244 West St, Carlton NSW 2218 • Phone: 9547 1488 • Fax: 9547 2104