


Operating Instructions

Read the following instructions carefully before operating the lock or changing the combination.

Two index marks are printed on the dial ring as shown below. Use index mark A to open the lock and index mark B to change the combination. Always turn the dial slowly and evenly. One revolution is completed each time you align the combination number with an index mark. Do not turn the dial back to compensate for overdialing a number. If you turn a combination number past the index mark, you must restart the sequence.

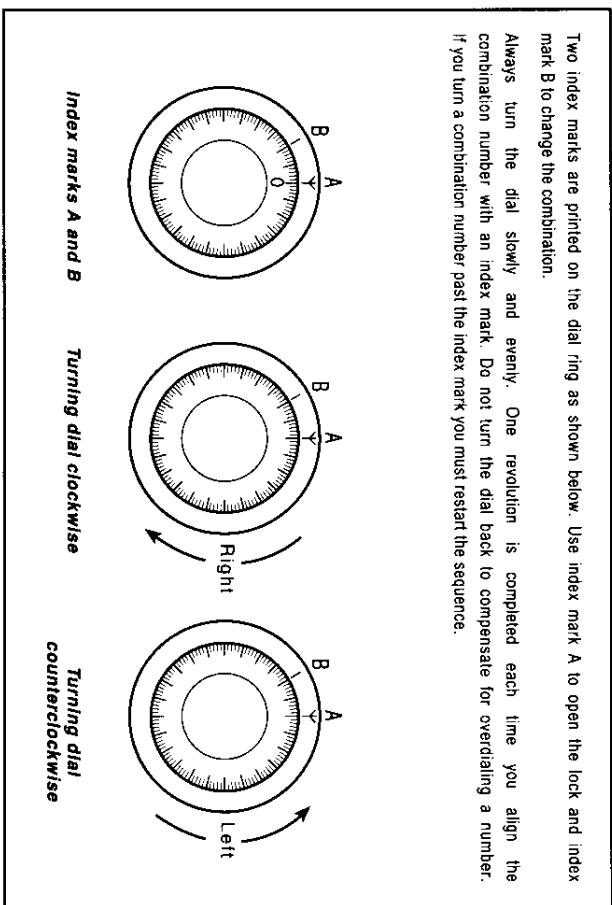

Unlocking using factory preset combination (10-20-30) :

1. Turn the dial COUNTER CLOCKWISE, stopping when "10" is aligned with the index mark A, the FOURTH time.
2. Turn the dial CLOCKWISE, stopping when "20" is aligned with the index mark A, the THIRD time.
3. Turn the dial COUNTER CLOCKWISE, stopping when "30" is aligned with the index mark A, the SECOND time.
4. Turn the dial slowly CLOCKWISE, until it stops.

Locking the lock

Turn the dial counterclockwise for at least four revolutions.

Changing the combination


Select three (3) new combination numbers. For the last number, DO NOT use any number between 0 and 20. For maximum security, do not use numbers that end in 0 or 5, and do not use numbers in sequence. For example: 27-86-48 is more secure than 27-48-86.

Warning: Never insert the change key into the lock while the cover is removed. Before turning the change key, ensure that the wing of the key is fully inserted into the lock.

1. Dial the existing combination to open the lock using index mark A and open the container door. For instructions see "Unlocking using factory preset combination".
2. Dial the existing combination again using index mark B.

Note: It might be helpful to cover A with tape when changing the combination.

3. With the last number aligned with index mark B, hold the dial securely in place so that it does not turn, and insert the change key into the keyhole in the back of the lock.
4. Ensure that the wing of the key is completely inside the lock and comes to a positive stop, and then turn the key 90° counter clockwise (see Figure 1).

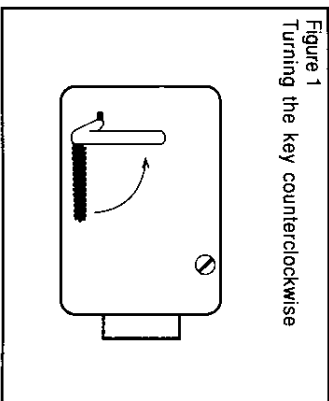

With the change key in the turned position, set the new combination as follows:

5. Turn the dial COUNTER CLOCKWISE, stopping when the first number is aligned with the index mark B, the fourth time.

Turn the dial CLOCKWISE, stopping when the second number is aligned with the index mark B, the third time.

6. Turn the dial CLOCKWISE, stopping when the second number is aligned with the index mark B, the third time.
7. Turn the dial COUNTER CLOCKWISE, stopping when the third number is aligned with the index mark B, the second time.

With the last number of the new combination aligned with index mark B, hold the dial securely in place and turn the change key 90° clockwise and remove it (see Figure 2).

Cautions: Before closing the container, try the new combination several times using index mark A to ensure that the combination works. If you close the container and the combination does not work (you cannot retract the bolt and open the container), contact a qualified safe technician.

