



**CMI SAFE CO.**

A.C.N. 057 073 033

Head Office: 244 WEST STREET, CARLTON, N.S.W. 2218


Phone: (02) 9547 1488 (5 lines) Fax: (02) 9547 2104

Web Site: <http://www.cmisafe.com.au> Email: [sales@cmisafe.com.au](mailto:sales@cmisafe.com.au)

Agents in all major cities throughout Australia


LAGARI) DEAD BOLT

Enter code and twist keypad to unlock

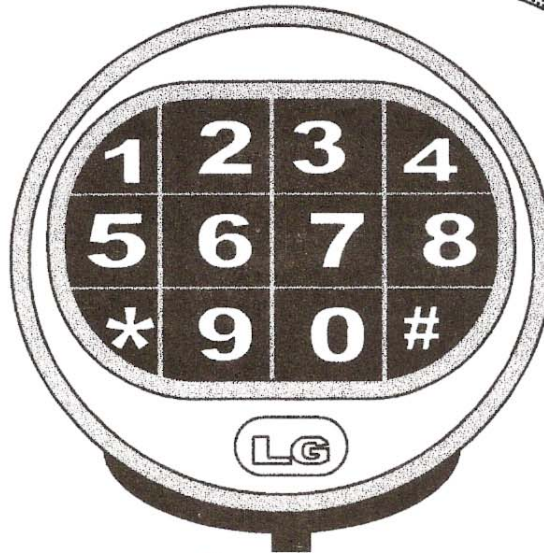

Remove ( pull tab down ) on battery cover to replace battery.

Use only 9 volt ALKALINE batteries in this lock, preferably DURACELL

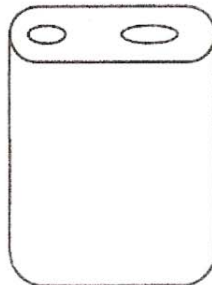

To Open

To Lock

Enter 1 2 3 4 5 6 ( Factory Set )

Each number is accompanied by a single beep & flash

2 beeps at the end of entry signifies number accepted.

3 beeps at the end of the fourth set of entries, indicates four (4) wrong codes have been entered and you are now in penalty time.

*See Anti Tamper*

On a successful code entry, turn the keypad clockwise until it stops. Lock is now open.

Close door. Turn keypad anti clockwise until it stops

# LG Basic turnpad lock operating instructions

# Changing your code

Change your code with the door of the safe open

1. Enter 0 0 0 0 0 0 (6 zero's)
2. Enter the old code (Factory set 1 2 3 4 5 6)
3. Enter new code twice e.g. (9 2 3 4 5 7 + 9 2 3 4 5 7)
4. 2 beeps signifies new code has been accepted.
5. Test new code before closing door.

Note: The number returns to the original code if the change has been unsuccessful.

---

## Anti Tamper feature

Entering four (4) sets of wrong codes in a row, puts the lock into an 8 minute lockout penalty time during which the lock is inoperable.

During the penalty time The LED flashes at 10 second intervals until the 8 minutes has expired. If one wrong code is entered again immediately after the penalty time, the lock will go into penalty time again.

Only the correct code will open & reset the lock.

---

## Low Battery indication

Multiple beeps after entering the code indicates the battery needs changing.

---

## **General**

Battery life on 2 openings per day is approx, 12 months

There is no memory loss if the batteries are removed for any length of time.

Keep liquids and continuous moisture away from the keypad

Contact your nearest Distributor or CMI Safe Co for any further information in this lock.  
Or any CMI products.

**CMI SAFE CO.** A.B.N. 20 118 637 245

Head Office: 244 WEST STREET, CARLTON, N.S.W. 2218

Phone: (02) 9547 1488 (5 lines) Fax: (02) 9547 2104

Web Site: <http://www.cmisafe.com.au> Email: [sales@cmisafe.com.au](mailto:sales@cmisafe.com.au)

Agents in all major cities throughout Australia



KK KB 10 2002